



rba

INSTALLATION INSTRUCTIONS

SECURITY SHOWER PANEL MODEL A1741 AND A1741-FA




Pictured: A1741 Security Shower Panel (Rear Fixed)
Also Available: A1741-FA Security Shower Panel (Front Fixed)



For further information,
contact the nearest RBA Group office:
SYDNEY • MELBOURNE • BRISBANE
Phone: 1300 788 778 • Fax: 1300 788 878
info@rba.com.au • www.rba.com.au

INSTALLATION

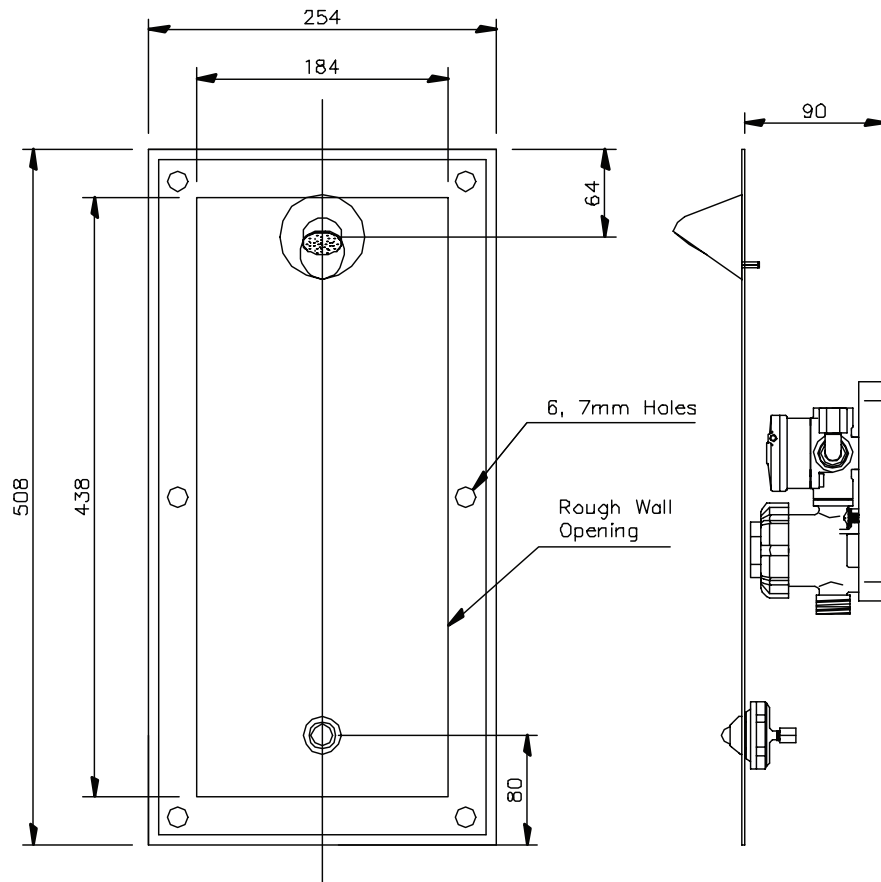

1741-FA SECURITY WALL SHOWER - FRONT ACCESS

INSTALLATION

Refer to "Installation Instructions Air-Trol Valve Model 03M" for specific valve requirements.

The Air-Trol valve may be installed either in the recess behind the panel, or remotely at a distance not greater than 6 meters.

Installing Panel

Make the appropriate connections between the valve, activation button and shower rose using the tube provided, and turn on the water. Check for leaks, and if necessary adjust the flow time.

Secure the panel to the wall using appropriate wall anchors and security type screws if required.